


Precision-honed components for reliable operation in challenging environments

Built to  
**Graco**  
Quality Standards

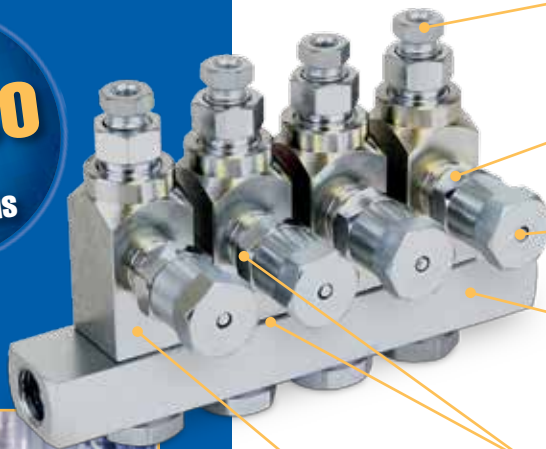

### Seven Outlet Fitting Sizes

Use your preferred size of tubing or hose

### Adjustable Injector Output

Adjust output volume on each injector for a custom fit in any application

### Visual Indicator Pin

Convenient front-mounted cycle pin indicator confirms that the injector is functioning properly

### Wide Range of Manifold Options



Manifolds designed to hold up to 15 injectors decrease installation time

### Long-Life Seals

Graco-quality manifold and indicator seals deliver increased productivity

### One-Piece, Machined Body

Provides durability not seen in other brands



### Long Life Seal Technology

Longer-life seals mean less-frequent replacement or repair and keeps your machines running longer

### Manifold Seal Integrity

Exclusive seal design virtually eliminates leaks at the manifold

## Technical Specifications

	GL-32	GL-43	GL-33	GL-42
Maximum operating pressure	3500 psi (241 bar)	1000 psi (69 bar)	3500 psi (241 bar)	1000 psi (69 bar)
Minimum operating pressure	1200 psi (83 bar)	750 psi (52 bar)	1200 psi (83 bar)	750 psi (52 bar)
Typical operating pressure	1500 psi (103 bar)	850 psi (59 bar)	1500 psi (103 bar)	850 psi (59 bar)
Reset pressure	200 psi (13.7 bar)	150 psi (10 bar)	200 psi (13.7 bar)	150 psi (10 bar)
Output volume per cycle	0.001 - 0.008 in <sup>3</sup> (0.02 - 0.13 cm <sup>3</sup> )		0.001 - 0.003 in <sup>3</sup> (0.02 - 0.05 cm <sup>3</sup> )	
Maximum temperature rating	350° F (176° C)			
Recommended fluids	Grease up to NLGI #2	SAE 10 weight oil minimum	Grease up to NLGI #2	SAE 10 weight oil minimum
Instruction manual	313798		334495	

For ordering information on the wide range of GL Series Injectors, visit [Graco.com](http://Graco.com).

Contact us today!

Call **800-533-9655** to speak with a Graco representative, or visit [www.graco.com](http://www.graco.com) for more information.

