

# CleanScrape® Secondary Cleaner




The **CleanScrape® Secondary Cleaner** is an all stainless steel assembly featuring independent 6 inch wide blades with carbide tips. Each blade tip is supported on spring loaded arms at both ends. The load springs allow independent blade rotation back and forward as well as up and down. This “range-of-motion” provides equal load pressure across each blade, absorbs obstructions, conforms to ever-changing belt undulations, and is able to arc safely in the event of reversing belt direction or belt roll back.

### FEATURES & BENEFITS

- Optimum cleaning results
- “Free Flow” design allows for material to pass through arms
- Crowned Mainframe design compensates for belt wear in the center
- Low Blade-to-Belt pressure
- Simple installation inside or outside of chute
- Removed material returns to main flow
- Requires less tensioning over lifespan
- Handles reversing belts and belt rollback without damage to belt
- Easy cartridge removal
- Easy adjustment of cleaning pressure

### NOMENCLATURE

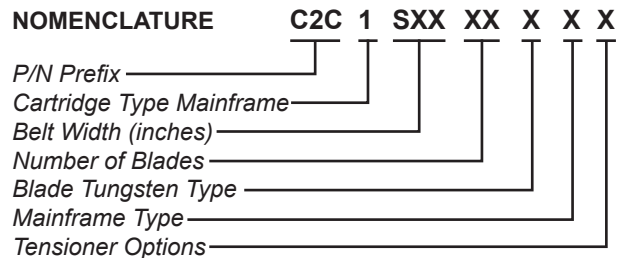

### BLADE TUNGSTEN TYPE

1: Tungsten Carbide

### MAINFRAME TYPE\*

E: Extended Stainless Steel  
S: Stainless Steel  
P: Painted Steel  
Z: Extended Painted Steel

\*Extended mainframe is 18 in. (457 mm) longer than standard mainframe.

### TENSIONER OPTIONS

0: No Tensioner  
S: Stainless Steel  
T: Steel

### DOOR OPTIONS

0: No Door  
D: Steel  
S: Stainless Steel

### SPECIFICATIONS

Cleaner Type	Belt Width in. (mm)	Maximum Belt Speed fpm (m/sec)	
		Vulcanized Splice	Mechanical Splice
C2C1SXXXXXX	18–96 (457–2438)	900 (5)	600 (3)



**Martin Engineering USA**  
One Martin Place  
Neponset, IL 61345-9766 USA  
800 544 2947 or 309 852 2384  
Fax 800 814 1553  
www.martin-eng.com

**COMPANY WITH  
QUALITY SYSTEM  
CERTIFIED BY DNV GL  
= ISO 9001 =**