

Martin® QC1™ Cleaner PD



The [Martin® QC1™ Cleaner PD](#) provides maximum durability and performance across a wide range of duties and applications. This sturdy cleaner features one-pin blade change, making replacement of a worn blade a simple procedure. The one-piece urethane blade has a “CARP” (Constant Angle Radial Pressure) design to maintain cleaning performance through all stages of blade life.

The Martin® QC1™ PD Cleaner includes a Spring Tensioner to maintain proper cleaning pressure while minimizing the need for adjustment.

SPECIFICATIONS

Maximum Belt Speed fpm (m/sec)	Maximum Service Temperature	Pulley Diameter in. (mm)	Mounting Location**		Wear Life* in. (mm)	Wear Volume (per inch of blade) in ³ (cm ³)
			Pulley Diameter	Mounting Dimension		
900 (4.6)	160°F (70°C) Continuous 180°F (82°C) Intermittent	12-23 (305-584)	12-15 (305-381)	4.0 (100)	4.5 (114)	6.53 (107)
			16-23 (406-584)	3.5 (89)		


* Amount of usable blade

** Pulley diameter 23 in. (584 mm) and greater: contact your Martin Engineering representative.

High-performance urethanes are available; see your Martin Engineering representative for assistance in specifying non-standard products. Refer to Form No. L3375.

NOMENCLATURE

38556 - XX XX XX XX X X

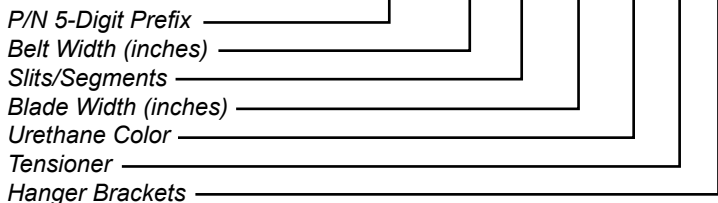

SLITS/SEGMENTS

11: No slits or segments

TENSIONER

S: Martin® Spring Tensioner


URETHANE COLOR

BR: Brown
GR: Green
Blank: Orange

BRACKETS

H: Hanger Brackets
Blank: Without Hanger Brackets

MOUNTING LOCATION

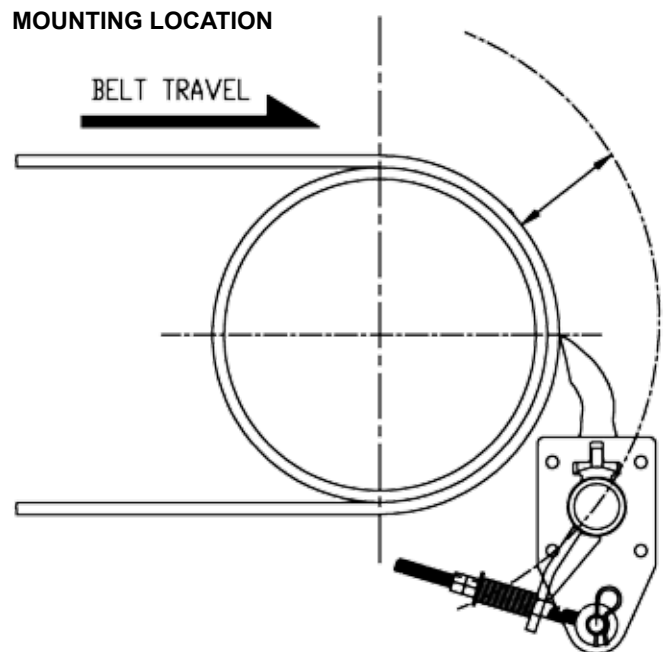


TECHNICAL DATA SHEET

DIMENSIONS -- mm (in.)

Belt Width mm (in.)	Mainframe Length mm (in.)	Belt Coverage mm (in.)	Shipping Weight* lb. (kg)
450 (18)	1219 (48)	406 (16)	20 (43)
600 (24)	1372 (54)	559 (22)	23 (51)
750 (30)	1524 (60)	711 (28)	27 (59)
800 (36)	1676 (66)	762 (30)	31 (68)
1000 (42)	1829 (72)	914 (36)	34 (76)
1200 (48)	1981 (78)	1067 (42)	38 (84)
1400 (54)	2134 (84)	1219 (48)	42 (92)
1600 (60)	2286 (90)	1473 (58)	46 (101)
1800 (72)	2591 (102)	1676 (66)	53 (117)
2000 (78)	2743 (108)	1829 (72)	57 (126)
2200 (90)	3048 (120)	2083 (82)	65 (143)
2400 (96)	3200 (126)	2286 (92)	69 (152)

Notes: Dual Martin® Spring Tensioners are required for belt widths 54 in. (1400 mm) and greater.

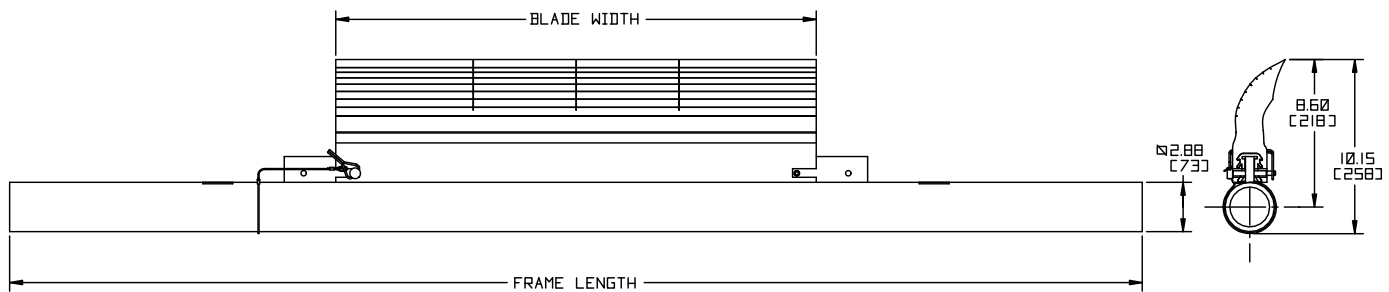

FREQUENTLY ASKED QUESTIONS

My Pre-Cleaner keeps flipping through.

The mounting location may be too far away from the belt. Relocate to the proper dimension. Replace the mainframe if it is bent.

My Pre-Cleaner is wearing more in the center of the blade.

The blade is too wide for this application. Replace with a shorter length blade.

ACCESSORIES

Part	P/N
Martin® Single Spring Tensioner	38555-1
Martin® Dual Spring Tensioner	38555-2



MARTIN ENGINEERING COMPANY INDIA PVT. LTD.

U Turn Industrial Hub, Shed No. 5
Gat No. 301, Kharabwadi, Chakan Tal-Khed
Dist - Pune - 410 501, Maharashtra, India

Phone: +91 2135 674000
Fax: +91 2135 674012
Email: gudithn@martin-eng.com

www.martin-eng.in

Problem Solved™ GUARANTEED!

Form No. L3799-11/13
© Martin Engineering Company 2009, 2013